

LEXCOR

# FLASH-TITE


## Drain Ballast Guards

### DESCRIPTION & USE

- Used on protected membrane (inverted) roof assemblies to keep loose ballast from piling up against the strainer or falling through the strainer

### TECHNICAL DATA

Flash-Tite™ Ballast Guards are fabricated from 20 ga. 6 mm (1/4") d. hole perforated stainless steel.

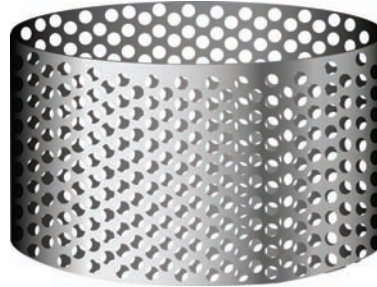

### INSTALLATION

Slip the Ballast Guard over the top of a standard strainer so that it is positioned around the drain strainer to hold ballast back.

### SPECIFICATION

Ballast Guards should be included with a Flash-Tite™ Drain specification by simply specifying that the Flash-Tite™ Drain be equipped with Ballast Guards. For a more detailed specification, add the following example paragraph:

Ballast Guards shall consist of 20 ga. 6 mm (1/4") d. hole perforated stainless steel and shall be positioned around the drain strainers to hold the ballast back.

ACCEPTED PRODUCT: Flash-Tite™ Drain Ballast Guard by Lexcor (www.lexcor.net, Tel: 1-800-268-2889, info@lexcor.net)

lexcor.net

Visit our video channels: <https://vimeo.com/channels/lexcoren>

#### COMMERCIAL BUILDING PRODUCTS

Ontario & Western Canada  
1.800.268.2889



Quebec & Eastern Canada  
1.800.363.2307